


# eucaPW<sup>SV</sup>

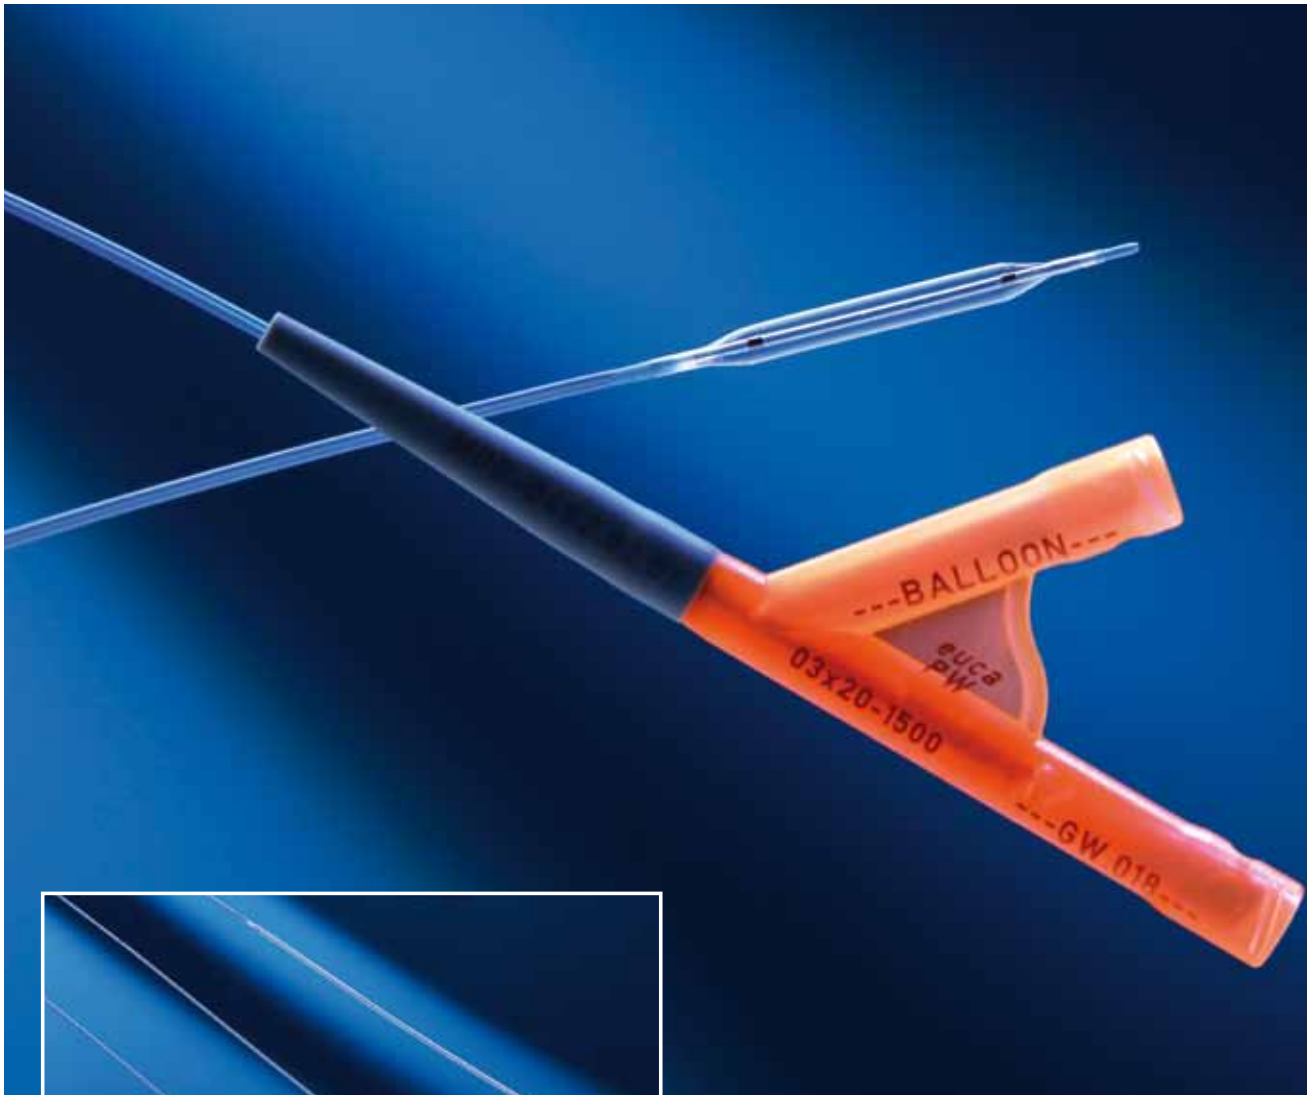

Low Profile •  
**4F Device**

- Superior radiopacity
- Atraumatic soft tip
- Balloon length up to 150 mm
- Long lesion treatment
- High kinking stability
- Balloon Ø 2 to 5 mm
- 0.018" Guidewire

**Infrapopliteal OTW  
PTA Balloon Catheter  
4F Device**

The excellent  
choice.  
BTK treatment  
to its best

### Balloon - Ø [mm] pressure related

nominal Balloon - Ø	2,00	2,50	3,00	4,00	5,00
Pressure [MPa / bar]					
0.6 / 6	1,91	2,43	2,95	3,88	4,78
0.7 / 7	1,96	2,47	2,98	3,94	4,89
0.8 / 8	2,00	2,50	3,00	4,00	5,00
0.9 / 9	2,04	2,53	3,03	4,06	5,11
1.0 / 10	2,09	2,57	3,05	4,12	5,22
1.1 / 11	2,13	2,60	3,08	4,18	5,32
1.2 / 12	2,18	2,63	3,10	4,24	5,43
1.3 / 13	2,22	2,67	3,13	4,30	5,54
1.4 / 14	2,27	2,70	3,15	4,36	5,65
1.5 / 15	2,31	2,73	3,18	4,42	5,76
1.6 / 16	2,35	2,77	3,20	4,48	5,86
1.7 / 17	2,40	2,80	3,23	4,54	
1.8 / 18	2,44	2,83	3,25		
1.9 / 19	2,49	2,87	3,28		
2.0 / 20	2,53	2,90			

NIP (nominal inflation pressure)	0.8 MPa / 8 bar	
RBP (rated burst pressure) = MRP (maximum recommended pressure)	x.xx	For PTA balloon catheter with balloon length ≤ 120 mm. PTA balloon catheter with a balloon length > 120 mm the rated burst pressure is reduced by 0.2 MPa / 2 bar.

### PW<sup>SV</sup> - Peripheral small vessel PTA balloon catheter

### Size and order number matrix

	Diameter in mm - Length of balloon in mm						
	20	40	60	80	120	150	
Usable catheter length 85 cm	2,00	PWSV 020/020-085	PWSV 020/040-085	PWSV 020/060-085	PWSV 020/080-085	PWSV 020/120-085	PWSV 020/150-085
	2,50	PWSV 025/020-085	PWSV 025/040-085	PWSV 025/060-085	PWSV 025/080-085	PWSV 025/120-085	PWSV 025/150-085
	3,00	PWSV 030/020-085	PWSV 030/040-085	PWSV 030/060-085	PWSV 030/080-085	PWSV 030/120-085	PWSV 030/150-085
	4,00	PWSV 040/020-085	PWSV 040/040-085	PWSV 040/060-085	PWSV 040/080-085	-	-
	5,00	PWSV 050/020-085	PWSV 050/040-085	PWSV 050/060-085	PWSV 050/080-085	-	-
Usable catheter length 135 cm	2,00	PWSV 020/020-135	PWSV 020/040-135	PWSV 020/060-135	PWSV 020/080-135	PWSV 020/120-135	PWSV 020/150-135
	2,50	PWSV 025/020-135	PWSV 025/040-135	PWSV 025/060-135	PWSV 025/080-135	PWSV 025/120-135	PWSV 025/150-135
	3,00	PWSV 030/020-135	PWSV 030/040-135	PWSV 030/060-135	PWSV 030/080-135	PWSV 030/120-135	PWSV 030/150-135
	4,00	PWSV 040/020-135	PWSV 040/040-135	PWSV 040/060-135	PWSV 040/080-135	-	-
	5,00	PWSV 050/020-135	PWSV 050/040-135	PWSV 050/060-135	PWSV 050/080-135	-	-
Usable catheter length 150 cm	2,00	PWSV 020/020-150	PWSV 020/040-150	PWSV 020/060-150	PWSV 020/080-1350	PWSV 020/120-150	PWSV 020/150-150
	2,50	PWSV 025/020-150	PWSV 025/040-150	PWSV 025/060-150	PWSV 025/080-150	PWSV 025/120-150	PWSV 025/150-150
	3,00	PWSV 030/020-150	PWSV 030/040-150	PWSV 030/060-150	PWSV 030/080-150	PWSV 030/120-150	PWSV 030/150-150
	4,00	PWSV 040/020-150	PWSV 040/040-150	PWSV 040/060-150	PWSV 040/080-150	-	-
	5,00	PWSV 050/020-150	PWSV 050/040-150	PWSV 050/060-150	PWSV 050/080-150	-	-

Catheter design: OTW - Over the wire  
Shaft diameter: 4F

Introducer sheath compatibility: 4F  
Max. recommended guidewire: 0.018"